


Battery Parallel Connection Instruction

This setup is suitable for Isuna series models with two separate battery branches. If the customer has only one battery string and one battery is connected, the maximum input power of the battery is only half of the power of the inverter. In order to achieve the maximum power of the inverter, a single battery can be connected in parallel to the two battery branches of the inverter, the schematic diagram is as follows:



APP Settings are as follow:

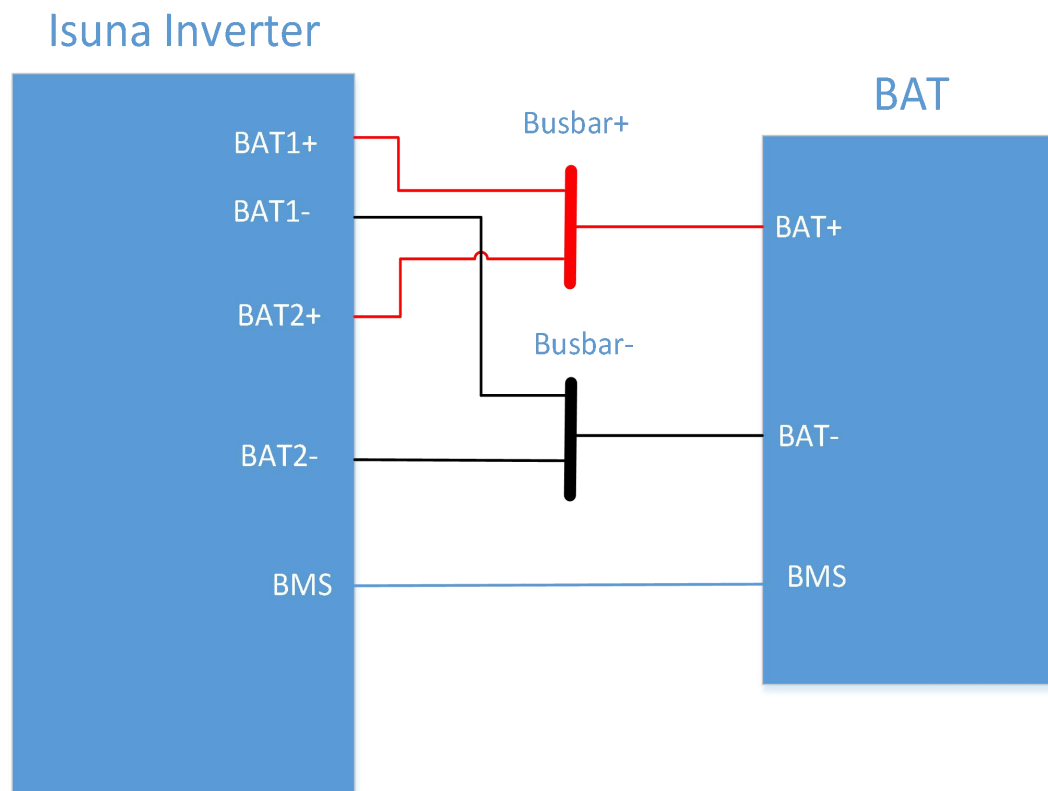